

# 802.11AX WIRELESS MODULES

## WiFi 6E (802.11ax) 4×4 MU-MIMO OFDMA 5GHz + 6GHz Wide Band Wireless Module

Model: **WLE3000H56**



### KEY FEATURES

- Qualcomm QCN9024 'Pine' series for Commercial Grade.
- Qualcomm QCN9074-I 'Pine' series for Industrial Grade.
- 5GHz - 6GHz, 4x4 MU-MIMO OFDMA Technology, up to 4804Mbps physical data rate.
- Standard size MiniPCIe Interface with PCIe 3.0
- Based on PN02.1 reference design
- -20°C to 70°C operating temperature for commercial grade.
- -40°C to 85°C operating temperature for industrial grade.

## Specifications

Chipset	Qualcomm QCN9024 'Pine' series for Commercial Grade. Qualcomm QCN9074-I 'Pine' series for Industrial Grade.
System Memory	2Mbit serial I <sup>2</sup> C bus EEPROM
Reference Design	PN02.1
Host Interface	Mini PCI Express 3.0 Standard
Operating Voltage	3.3V
Power Consumption	8W
Wireless	5GHz 802.11a/n/ac/ax, max 18 dBm per chain 6GHz 802.11ax, max 18 dBm per chain 4x U.FL Connectors
Frequency Range	5.180 ~ 7.125 GHz
Modulation Techniques	OFDMA: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024QAM
Channel Spectrum Widths for WLAN	Supports 20/40/80/160MHz at 5-6GHz
Operating Systems	Linux
Certification	CE Certified, REACH & RoHS Compliance
Environmental Temperature	Operating (Commercial Grade): -20°C to 70°C, Storage: -40°C to 90°C Operating (Industrial Grade): -40°C to 85°C, Storage: -40°C to 90°C
Environmental Humidity, Non-Condensing	Operating: 5% to 95%, Storage: Max. 90%
Dimensions (W x H x D) in mm	30 X 50.8 X 13.5 mm

\*Configurations are subject to change without notifications.

\*\*Can be requested from respective sales executive.

Copyright © yuneng Micro. All rights reserved. While every effort is made to ensure the information is accurate, yuneng Micro does not accept liability for any errors or mistakes that may arise. All specifications are subject to change without notice.

# 802.11AX WIRELESS MODULES

## RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (4 chains)	Tolerance		Data Rate	RX Specifications Sensitivity	Tolerance
802.11ax HE20	MCS 0	18dBm	24dBm	±2dB	802.11ax HE20	MCS 0	-95dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB		MCS 1	-93dBm	±2dB
	MCS 2	17dBm	23dBm	±2dB		MCS 2	-90dBm	±2dB
	MCS 3	16dBm	22dBm	±2dB		MCS 3	-88dBm	±2dB
	MCS 4	16dBm	22dBm	±2dB		MCS 4	-86dBm	±2dB
	MCS 5	15dBm	21dBm	±2dB		MCS 5	-82dBm	±2dB
	MCS 6	14dBm	20dBm	±2dB		MCS 6	-79dBm	±2dB
	MCS 7	14dBm	20dBm	±2dB		MCS 7	-77dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB		MCS 8	-73dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB		MCS 9	-71dBm	±2dB
	MCS 10	12dBm	18dBm	±2dB		MCS 10	-67dBm	±2dB
	MCS 11	12dBm	18dBm	±2dB		MCS 11	-65dBm	±2dB
802.11ax HE40	MCS 0	18dBm	24dBm	±2dB	802.11ax HE40	MCS 0	-92dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB		MCS 1	-90dBm	±2dB
	MCS 2	17dBm	23dBm	±2dB		MCS 2	-88dBm	±2dB
	MCS 3	16dBm	22dBm	±2dB		MCS 3	-85dBm	±2dB
	MCS 4	16dBm	22dBm	±2dB		MCS 4	-82dBm	±2dB
	MCS 5	15dBm	21dBm	±2dB		MCS 5	-78dBm	±2dB
	MCS 6	14dBm	20dBm	±2dB		MCS 6	-76dBm	±2dB
	MCS 7	14dBm	20dBm	±2dB		MCS 7	-75dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB		MCS 8	-71dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB		MCS 9	-69dBm	±2dB
	MCS 10	12dBm	18dBm	±2dB		MCS 10	-65dBm	±2dB
	MCS 11	12dBm	18dBm	±2dB		MCS 11	-62dBm	±2dB
802.11ax HE80	MCS 0	18dBm	24dBm	±2dB	802.11ax HE80	MCS 0	-89dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB		MCS 1	-88dBm	±2dB
	MCS 2	17dBm	23dBm	±2dB		MCS 2	-85dBm	±2dB
	MCS 3	16dBm	22dBm	±2dB		MCS 3	-83dBm	±2dB
	MCS 4	16dBm	22dBm	±2dB		MCS 4	-79dBm	±2dB
	MCS 5	15dBm	21dBm	±2dB		MCS 5	-74dBm	±2dB
	MCS 6	14dBm	20dBm	±2dB		MCS 6	-73dBm	±2dB
	MCS 7	14dBm	20dBm	±2dB		MCS 7	-71dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB		MCS 8	-67dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB		MCS 9	-67dBm	±2dB
	MCS 10	12dBm	18dBm	±2dB		MCS 10	-62dBm	±2dB
	MCS 11	12dBm	18dBm	±2dB		MCS 11	-59dBm	±2dB

## RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (4 chains)	Tolerance
802.11ax HE160	MCS 0	18dBm	24dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB
	MCS 2	17dBm	23dBm	±2dB
	MCS 3	16dBm	22dBm	±2dB
	MCS 4	16dBm	22dBm	±2dB
	MCS 5	15dBm	21dBm	±2dB
	MCS 6	14dBm	20dBm	±2dB
	MCS 7	14dBm	20dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB
	MCS 10	12dBm	18dBm	±2dB
	MCS 11	12dBm	18dBm	±2dB


	Data Rate	RX Specifications Sensitivity	Tolerance
802.11ax HE160	MCS 0	-85dBm	±2dB
	MCS 1	-84dBm	±2dB
	MCS 2	-82dBm	±2dB
	MCS 3	-79dBm	±2dB
	MCS 4	-75dBm	±2dB
	MCS 5	-71dBm	±2dB
	MCS 6	-70dBm	±2dB
	MCS 7	-68dBm	±2dB
	MCS 8	-64dBm	±2dB
	MCS 9	-62dBm	±2dB
	MCS 10	-58dBm	±2dB
	MCS 11	-56dBm	±2dB

## Component Map



# 802.11AX WIRELESS MODULES

## Mechanical Dimensions

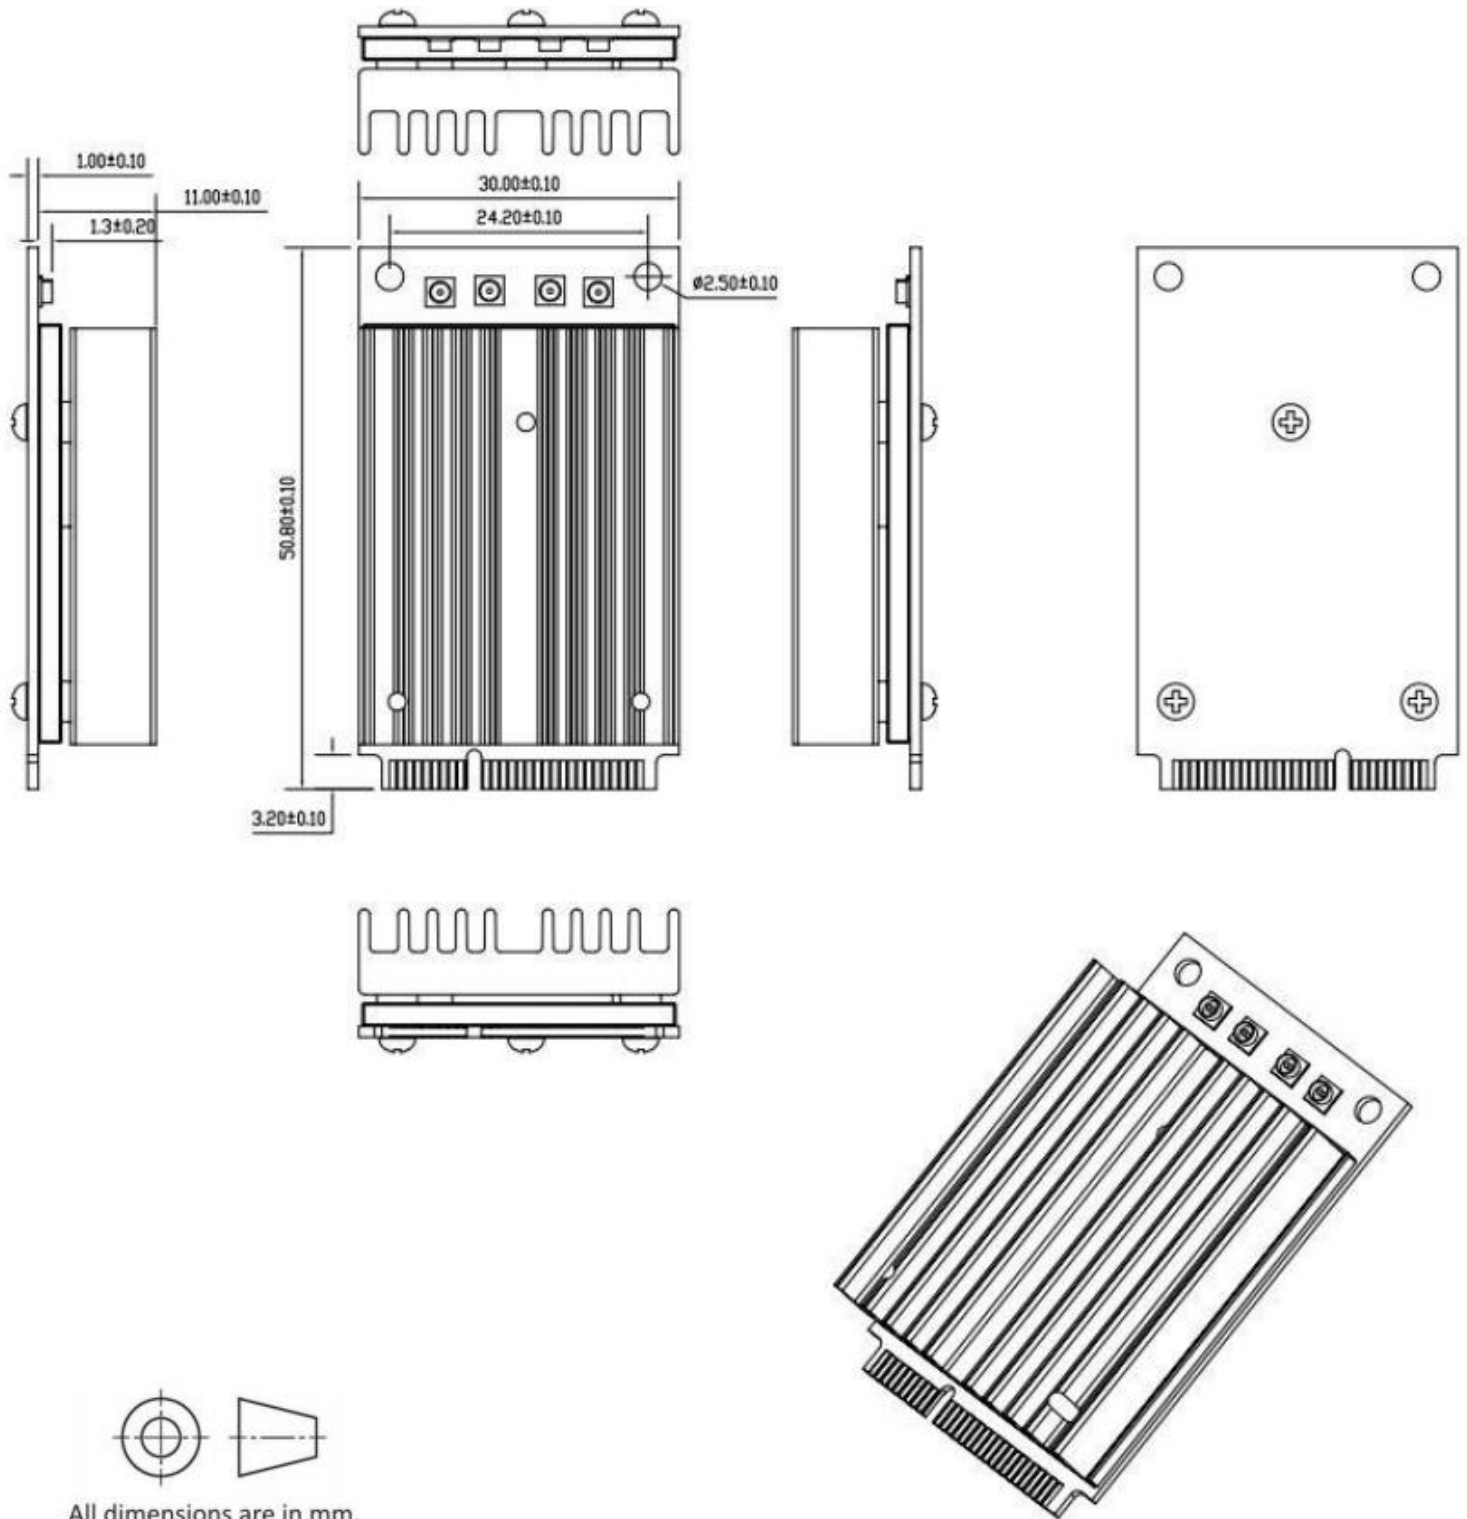

All dimensions are in mm.

# 802.11AX WIRELESS MODULES

## Ordering Configuration

Item Code	Model	Description
WLE3000H56 7A0924Q-TE	WLE3000H56	QCN9024 4x4 802.11a/n/ac/ax support 5GHz + 6GHz MiniPCIe interface with PCIe 3.0 Module
WLE3000H56 7B0974Q-I-TE	WLE3000H56-I	QCN9074 4x4 802.11a/n/ac/ax support 5GHz + 6GHz MiniPCIe interface with PCIe 3.0 Module