

WiFi 7 (802.11BE) 2x2 MU-MIMO 2.4+5GHz Dual Band Dual Concurrent Wireless Module

Model: WLTB7002E25



KEY FEATURES

- Qualcomm QCN6224 'Waikiki' series for Commercial Grade
- Qualcomm QCN9274-I 'Waikiki' series for Industrial Grade
- 2.4GHz, 2x2 MU-MIMO, up to 688 Mbps physical data rate
- 5GHz, 2x2 MU-MIMO, up to 4324 Mbps physical data rate
- Dual-Band Concurrent 2.4+5GHz WiFi 7 (802.11be)
- M.2 B+M Key interface with PCIe 3.0
- Based on WK03.2 reference design
- Supports up to 4096-QAM
- -20°C to 70°C operating temperature*

**For industrial-grade environmental temperature requirements, please contact our sales representative for a customized heatsink solution.*

Specifications

| | |
|--|--|
| Chipset | Qualcomm QCN6224 'Waikiki' series for Commercial grade Qualcomm QCN9274-I 'Waikiki' series for Industrial grade |
| System Memory | 2Mbit serial I ² C bus EEPROM |
| Reference Design | WK03.2 |
| Host Interface | M.2 B+M Key interface with PCIe 3.0 |
| Operating Voltage | 3.3V |
| Power Consumption | 8W (Max) |
| Wireless | 2x2 2.4GHz 802.11b/g/n/ax/be, max 20dBm per chain 2x2 5GHz 802.11a/n/ac/ax/be, max 18dBm per chain 2 x U.FL Connectors |
| Frequency Range | 2.4 GHz: 2.412~2.472GHz 5 GHz: 5.150~5.825GHz |
| Modulation Techniques | OFDMA: BPSK, QPSK, DBPSK, DQPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, 4096-QAM |
| Channel Spectrum Widths for WLAN | Supports 20/40MHz at 2.4GHz Supports 20/40/80/160/240MHz at 5GHz |
| Operating Systems | Linux |
| Certification | FCC, CE, IC Certified, REACH & RoHS Compliance |
| Environmental Temperature ^[1] | Operating temperature: -20°C to 70°C, Storage: -40°C to 90°C |
| Environmental Humidity, Non-Condensing | Operating: 5% to 95%, Storage: Max. 90% |
| Dimensions (W x H x D) in mm | 30 X 52 X 13.1 mm |

*Configurations are subject to change without notifications.

**Can be requested from respective sales executive.

[1] For industrial-grade environmental temperature requirements, please contact our sales representative for a customized heatsink solution.

RF Performance Table at 2.4GHz with Filter

| | Data Rate | TX Power (per chain) | TX Power (2 chains) | Tolerance |
|-----------------------------|-----------|----------------------|---------------------|-----------|
| 2.4GHz 802.11be EHT20 | MCS 0 | 20dBm | 23dBm | ±2dB |
| | MCS 1 | 20dBm | 23dBm | ±2dB |
| | MCS 2 | 20dBm | 23dBm | ±2dB |
| | MCS 3 | 19dBm | 22dBm | ±2dB |
| | MCS 4 | 18dBm | 21dBm | ±2dB |
| | MCS 5 | 17dBm | 20dBm | ±2dB |
| | MCS 6 | 16dBm | 19dBm | ±2dB |
| | MCS 7 | 15dBm | 18dBm | ±2dB |
| | MCS 8 | 14dBm | 17dBm | ±2dB |
| | MCS 9 | 14dBm | 17dBm | ±2dB |
| | MCS 10 | 13dBm | 16dBm | ±2dB |
| | MCS 11 | 13dBm | 16dBm | ±2dB |
| | MCS 12 | 12dBm | 15dBm | ±2dB |
| | MCS 13 | 12dBm | 15dBm | ±2dB |
| 2.4GHz 802.11be EHT40 | MCS 0 | 20dBm | 23dBm | ±2dB |
| | MCS 1 | 20dBm | 23dBm | ±2dB |
| | MCS 2 | 20dBm | 23dBm | ±2dB |
| | MCS 3 | 19dBm | 22dBm | ±2dB |
| | MCS 4 | 18dBm | 21dBm | ±2dB |
| | MCS 5 | 17dBm | 20dBm | ±2dB |
| | MCS 6 | 16dBm | 19dBm | ±2dB |
| | MCS 7 | 15dBm | 18dBm | ±2dB |
| | MCS 8 | 14dBm | 17dBm | ±2dB |
| | MCS 9 | 14dBm | 17dBm | ±2dB |
| | MCS 10 | 13dBm | 16dBm | ±2dB |
| | MCS 11 | 13dBm | 16dBm | ±2dB |
| | MCS 12 | 12dBm | 15dBm | ±2dB |
| | MCS 13 | 12dBm | 15dBm | ±2dB |

| | Data Rate | RX Specifications Sensitivity | Tolerance |
|-----------------------------|-----------|-------------------------------|-----------|
| 2.4GHz 802.11be EHT20 | MCS 0 | -92dBm | ±2dB |
| | MCS 1 | -90dBm | ±2dB |
| | MCS 2 | -88dBm | ±2dB |
| | MCS 3 | -85dBm | ±2dB |
| | MCS 4 | -81dBm | ±2dB |
| | MCS 5 | -77dBm | ±2dB |
| | MCS 6 | -76dBm | ±2dB |
| | MCS 7 | -74dBm | ±2dB |
| | MCS 8 | -70dBm | ±2dB |
| | MCS 9 | -69dBm | ±2dB |
| | MCS 10 | -65dBm | ±2dB |
| | MCS 11 | -63dBm | ±2dB |
| | MCS 12 | -59dBm | ±2dB |
| | MCS 13 | -57dBm | ±2dB |
| 2.4GHz 802.11be EHT40 | MCS 0 | -89dBm | ±2dB |
| | MCS 1 | -87dBm | ±2dB |
| | MCS 2 | -85dBm | ±2dB |
| | MCS 3 | -82dBm | ±2dB |
| | MCS 4 | -78dBm | ±2dB |
| | MCS 5 | -73dBm | ±2dB |
| | MCS 6 | -72dBm | ±2dB |
| | MCS 7 | -71dBm | ±2dB |
| | MCS 8 | -67dBm | ±2dB |
| | MCS 9 | -65dBm | ±2dB |
| | MCS 10 | -62dBm | ±2dB |
| | MCS 11 | -60dBm | ±2dB |
| | MCS 12 | -56dBm | ±2dB |
| | MCS 13 | -55dBm | ±2dB |

RF Performance Table at 5GHz

| | Data Rate | TX Power (per chain) | TX Power (2 chains) | Tolerance |
|---------------------------|-----------|----------------------|---------------------|-----------|
| 5GHz 802.11be EHT20 | MCS 0 | 18dBm | 21dBm | ±2dB |
| | MCS 1 | 18dBm | 21dBm | ±2dB |
| | MCS 2 | 17dBm | 20dBm | ±2dB |
| | MCS 3 | 17dBm | 20dBm | ±2dB |
| | MCS 4 | 16dBm | 19dBm | ±2dB |
| | MCS 5 | 16dBm | 19dBm | ±2dB |
| | MCS 6 | 15dBm | 18dBm | ±2dB |
| | MCS 7 | 15dBm | 18dBm | ±2dB |
| | MCS 8 | 14dBm | 17dBm | ±2dB |
| | MCS 9 | 14dBm | 17dBm | ±2dB |
| | MCS 10 | 13dBm | 16dBm | ±2dB |
| | MCS 11 | 13dBm | 16dBm | ±2dB |
| | MCS 12 | 12dBm | 15dBm | ±2dB |
| | MCS 13 | 12dBm | 15dBm | ±2dB |
| 5GHz 802.11be EHT40 | MCS 0 | 18dBm | 21dBm | ±2dB |
| | MCS 1 | 18dBm | 21dBm | ±2dB |
| | MCS 2 | 17dBm | 20dBm | ±2dB |
| | MCS 3 | 17dBm | 20dBm | ±2dB |
| | MCS 4 | 16dBm | 19dBm | ±2dB |
| | MCS 5 | 16dBm | 19dBm | ±2dB |
| | MCS 6 | 15dBm | 18dBm | ±2dB |
| | MCS 7 | 15dBm | 18dBm | ±2dB |
| | MCS 8 | 14dBm | 17dBm | ±2dB |
| | MCS 9 | 14dBm | 17dBm | ±2dB |
| | MCS 10 | 13dBm | 16dBm | ±2dB |
| | MCS 11 | 13dBm | 16dBm | ±2dB |
| | MCS 12 | 12dBm | 15dBm | ±2dB |
| | MCS 13 | 12dBm | 15dBm | ±2dB |
| 5GHz 802.11be EHT80 | MCS 0 | 18dBm | 21dBm | ±2dB |
| | MCS 1 | 18dBm | 21dBm | ±2dB |
| | MCS 2 | 17dBm | 20dBm | ±2dB |
| | MCS 3 | 17dBm | 20dBm | ±2dB |
| | MCS 4 | 16dBm | 19dBm | ±2dB |
| | MCS 5 | 16dBm | 19dBm | ±2dB |
| | MCS 6 | 15dBm | 18dBm | ±2dB |
| | MCS 7 | 15dBm | 18dBm | ±2dB |
| | MCS 8 | 14dBm | 17dBm | ±2dB |
| | MCS 9 | 14dBm | 17dBm | ±2dB |
| | MCS 10 | 13dBm | 16dBm | ±2dB |
| | MCS 11 | 13dBm | 16dBm | ±2dB |
| | MCS 12 | 12dBm | 15dBm | ±2dB |
| | MCS 13 | 12dBm | 15dBm | ±2dB |

| | Data Rate | RX Specifications Sensitivity | Tolerance |
|---------------------------|-----------|-------------------------------|-----------|
| 5GHz 802.11be EHT20 | MCS 0 | -91dBm | ±2dB |
| | MCS 1 | -89dBm | ±2dB |
| | MCS 2 | -86dBm | ±2dB |
| | MCS 3 | -83dBm | ±2dB |
| | MCS 4 | -80dBm | ±2dB |
| | MCS 5 | -76dBm | ±2dB |
| | MCS 6 | -74dBm | ±2dB |
| | MCS 7 | -73dBm | ±2dB |
| | MCS 8 | -69dBm | ±2dB |
| | MCS 9 | -68dBm | ±2dB |
| | MCS 10 | -64dBm | ±2dB |
| | MCS 11 | -62dBm | ±2dB |
| | MCS 12 | -58dBm | ±2dB |
| | MCS 13 | -56dBm | ±2dB |
| 5GHz 802.11be EHT40 | MCS 0 | -88dBm | ±2dB |
| | MCS 1 | -86dBm | ±2dB |
| | MCS 2 | -83dBm | ±2dB |
| | MCS 3 | -80dBm | ±2dB |
| | MCS 4 | -77dBm | ±2dB |
| | MCS 5 | -73dBm | ±2dB |
| | MCS 6 | -71dBm | ±2dB |
| | MCS 7 | -70dBm | ±2dB |
| | MCS 8 | -66dBm | ±2dB |
| | MCS 9 | -65dBm | ±2dB |
| | MCS 10 | -61dBm | ±2dB |
| | MCS 11 | -58dBm | ±2dB |
| | MCS 12 | -55dBm | ±2dB |
| | MCS 13 | -54dBm | ±2dB |
| 5GHz 802.11be EHT80 | MCS 0 | -85dBm | ±2dB |
| | MCS 1 | -83dBm | ±2dB |
| | MCS 2 | -80dBm | ±2dB |
| | MCS 3 | -78dBm | ±2dB |
| | MCS 4 | -75dBm | ±2dB |
| | MCS 5 | -70dBm | ±2dB |
| | MCS 6 | -69dBm | ±2dB |
| | MCS 7 | -68dBm | ±2dB |
| | MCS 8 | -64dBm | ±2dB |
| | MCS 9 | -62dBm | ±2dB |
| | MCS 10 | -59dBm | ±2dB |
| | MCS 11 | -57dBm | ±2dB |
| | MCS 12 | -54dBm | ±2dB |
| | MCS 13 | -52dBm | ±2dB |

RF Performance Table at 5GHz

| | Data Rate | TX Power (per chain) | TX Power (2 chains) | Tolerance |
|----------------------------|-----------|----------------------|---------------------|-----------|
| 5GHz 802.11be EHT160 | MCS 0 | 18dBm | 21dBm | ±2dB |
| | MCS 1 | 18dBm | 21dBm | ±2dB |
| | MCS 2 | 17dBm | 20dBm | ±2dB |
| | MCS 3 | 17dBm | 20dBm | ±2dB |
| | MCS 4 | 16dBm | 19dBm | ±2dB |
| | MCS 5 | 16dBm | 19dBm | ±2dB |
| | MCS 6 | 15dBm | 18dBm | ±2dB |
| | MCS 7 | 15dBm | 18dBm | ±2dB |
| | MCS 8 | 14dBm | 17dBm | ±2dB |
| | MCS 9 | 14dBm | 17dBm | ±2dB |
| | MCS 10 | 13dBm | 16dBm | ±2dB |
| | MCS 11 | 13dBm | 16dBm | ±2dB |
| | MCS 12 | 12dBm | 15dBm | ±2dB |
| | MCS 13 | 12dBm | 15dBm | ±2dB |

| | Data Rate | RX Specifications Sensitivity | Tolerance |
|----------------------------|-----------|-------------------------------|-----------|
| 5GHz 802.11be EHT160 | MCS 0 | -83dBm | ±2dB |
| | MCS 1 | -80dBm | ±2dB |
| | MCS 2 | -78dBm | ±2dB |
| | MCS 3 | -75dBm | ±2dB |
| | MCS 4 | -72dBm | ±2dB |
| | MCS 5 | -68dBm | ±2dB |
| | MCS 6 | -67dBm | ±2dB |
| | MCS 7 | -66dBm | ±2dB |
| | MCS 8 | -62dBm | ±2dB |
| | MCS 9 | -61dBm | ±2dB |
| | MCS 10 | -56dBm | ±2dB |
| | MCS 11 | -54dBm | ±2dB |
| | MCS 12 | -53dBm | ±2dB |
| | MCS 13 | -50dBm | ±2dB |

RF Performance Table at 5GHz with Filter

| | Data Rate | TX Power (per chain) | TX Power (2 chains) | Tolerance | | Data Rate | RX Specifications Sensitivity | Tolerance |
|---------------------------|-----------|----------------------|---------------------|-----------|---------------------------|-----------|-------------------------------|-----------|
| 5GHz 802.11be EHT20 | MCS 0 | 17dBm | 20dBm | ±2dB | 5GHz 802.11be EHT20 | MCS 0 | -91dBm | ±2dB |
| | MCS 1 | 17dBm | 20dBm | ±2dB | | MCS 1 | -89dBm | ±2dB |
| | MCS 2 | 17dBm | 20dBm | ±2dB | | MCS 2 | -86dBm | ±2dB |
| | MCS 3 | 17dBm | 20dBm | ±2dB | | MCS 3 | -83dBm | ±2dB |
| | MCS 4 | 16dBm | 19dBm | ±2dB | | MCS 4 | -80dBm | ±2dB |
| | MCS 5 | 15dBm | 18dBm | ±2dB | | MCS 5 | -76dBm | ±2dB |
| | MCS 6 | 14dBm | 17dBm | ±2dB | | MCS 6 | -74dBm | ±2dB |
| | MCS 7 | 14dBm | 17dBm | ±2dB | | MCS 7 | -73dBm | ±2dB |
| | MCS 8 | 13dBm | 16dBm | ±2dB | | MCS 8 | -69dBm | ±2dB |
| | MCS 9 | 13dBm | 16dBm | ±2dB | | MCS 9 | -68dBm | ±2dB |
| | MCS 10 | 12dBm | 15dBm | ±2dB | | MCS 10 | -64dBm | ±2dB |
| | MCS 11 | 11dBm | 14dBm | ±2dB | | MCS 11 | -62dBm | ±2dB |
| | MCS 12 | 11dBm | 14dBm | ±2dB | | MCS 12 | -58dBm | ±2dB |
| | MCS 13 | 11dBm | 14dBm | ±2dB | | MCS 13 | -56dBm | ±2dB |
| 5GHz 802.11be EHT40 | MCS 0 | 17dBm | 20dBm | ±2dB | 5GHz 802.11be EHT40 | MCS 0 | -88dBm | ±2dB |
| | MCS 1 | 17dBm | 20dBm | ±2dB | | MCS 1 | -86dBm | ±2dB |
| | MCS 2 | 16dBm | 19dBm | ±2dB | | MCS 2 | -83dBm | ±2dB |
| | MCS 3 | 16dBm | 19dBm | ±2dB | | MCS 3 | -80dBm | ±2dB |
| | MCS 4 | 16dBm | 19dBm | ±2dB | | MCS 4 | -77dBm | ±2dB |
| | MCS 5 | 15dBm | 18dBm | ±2dB | | MCS 5 | -73dBm | ±2dB |
| | MCS 6 | 14dBm | 17dBm | ±2dB | | MCS 6 | -71dBm | ±2dB |
| | MCS 7 | 14dBm | 17dBm | ±2dB | | MCS 7 | -70dBm | ±2dB |
| | MCS 8 | 13dBm | 16dBm | ±2dB | | MCS 8 | -66dBm | ±2dB |
| | MCS 9 | 13dBm | 16dBm | ±2dB | | MCS 9 | -65dBm | ±2dB |
| | MCS 10 | 12dBm | 15dBm | ±2dB | | MCS 10 | -61dBm | ±2dB |
| | MCS 11 | 12dBm | 15dBm | ±2dB | | MCS 11 | -58dBm | ±2dB |
| | MCS 12 | 11dBm | 14dBm | ±2dB | | MCS 12 | -55dBm | ±2dB |
| | MCS 13 | 11dBm | 14dBm | ±2dB | | MCS 13 | -54dBm | ±2dB |
| 5GHz 802.11be EHT80 | MCS 0 | 17dBm | 20dBm | ±2dB | 5GHz 802.11be EHT80 | MCS 0 | -85dBm | ±2dB |
| | MCS 1 | 17dBm | 20dBm | ±2dB | | MCS 1 | -83dBm | ±2dB |
| | MCS 2 | 16dBm | 19dBm | ±2dB | | MCS 2 | -80dBm | ±2dB |
| | MCS 3 | 16dBm | 19dBm | ±2dB | | MCS 3 | -78dBm | ±2dB |
| | MCS 4 | 16dBm | 19dBm | ±2dB | | MCS 4 | -75dBm | ±2dB |
| | MCS 5 | 15dBm | 18dBm | ±2dB | | MCS 5 | -70dBm | ±2dB |
| | MCS 6 | 14dBm | 17dBm | ±2dB | | MCS 6 | -69dBm | ±2dB |
| | MCS 7 | 14dBm | 17dBm | ±2dB | | MCS 7 | -68dBm | ±2dB |
| | MCS 8 | 13dBm | 16dBm | ±2dB | | MCS 8 | -64dBm | ±2dB |
| | MCS 9 | 13dBm | 16dBm | ±2dB | | MCS 9 | -62dBm | ±2dB |
| | MCS 10 | 12dBm | 15dBm | ±2dB | | MCS 10 | -59dBm | ±2dB |
| | MCS 11 | 12dBm | 15dBm | ±2dB | | MCS 11 | -57dBm | ±2dB |
| | MCS 12 | 11dBm | 14dBm | ±2dB | | MCS 12 | -54dBm | ±2dB |
| | MCS 13 | 11dBm | 14dBm | ±2dB | | MCS 13 | -52dBm | ±2dB |

RF Performance Table at 5GHz with Filter






| | Data Rate | TX Power (per chain) | TX Power (2 chains) | Tolerance |
|----------------------------|-----------|----------------------|---------------------|-----------|
| 5GHz 802.11be EHT160 | MCS 0 | 17dBm | 20dBm | ±2dB |
| | MCS 1 | 17dBm | 20dBm | ±2dB |
| | MCS 2 | 16dBm | 19dBm | ±2dB |
| | MCS 3 | 16dBm | 19dBm | ±2dB |
| | MCS 4 | 16dBm | 19dBm | ±2dB |
| | MCS 5 | 15dBm | 18dBm | ±2dB |
| | MCS 6 | 14dBm | 17dBm | ±2dB |
| | MCS 7 | 14dBm | 17dBm | ±2dB |
| | MCS 8 | 13dBm | 16dBm | ±2dB |
| | MCS 9 | 13dBm | 16dBm | ±2dB |
| | MCS 10 | 12dBm | 15dBm | ±2dB |
| | MCS 11 | 12dBm | 15dBm | ±2dB |
| | MCS 12 | 11dBm | 14dBm | ±2dB |
| | MCS 13 | 11dBm | 14dBm | ±2dB |

| | Data Rate | RX Specifications Sensitivity | Tolerance |
|----------------------------|-----------|-------------------------------|-----------|
| 5GHz 802.11be EHT160 | MCS 0 | -83dBm | ±2dB |
| | MCS 1 | -80dBm | ±2dB |
| | MCS 2 | -78dBm | ±2dB |
| | MCS 3 | -75dBm | ±2dB |
| | MCS 4 | -72dBm | ±2dB |
| | MCS 5 | -68dBm | ±2dB |
| | MCS 6 | -67dBm | ±2dB |
| | MCS 7 | -66dBm | ±2dB |
| | MCS 8 | -62dBm | ±2dB |
| | MCS 9 | -61dBm | ±2dB |
| | MCS 10 | -56dBm | ±2dB |
| | MCS 11 | -54dBm | ±2dB |
| | MCS 12 | -53dBm | ±2dB |
| | MCS 13 | -50dBm | ±2dB |

Component Map



Mechanical Dimensions

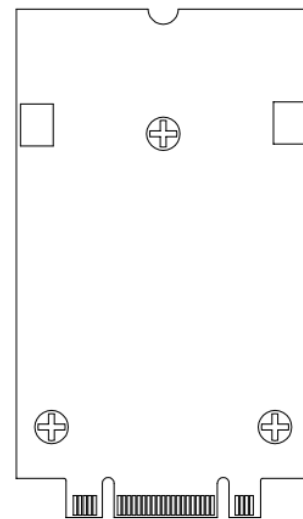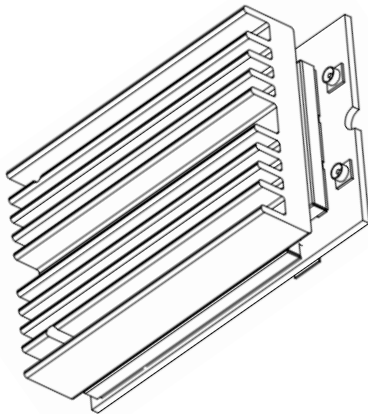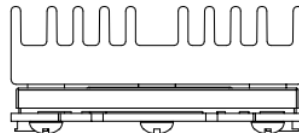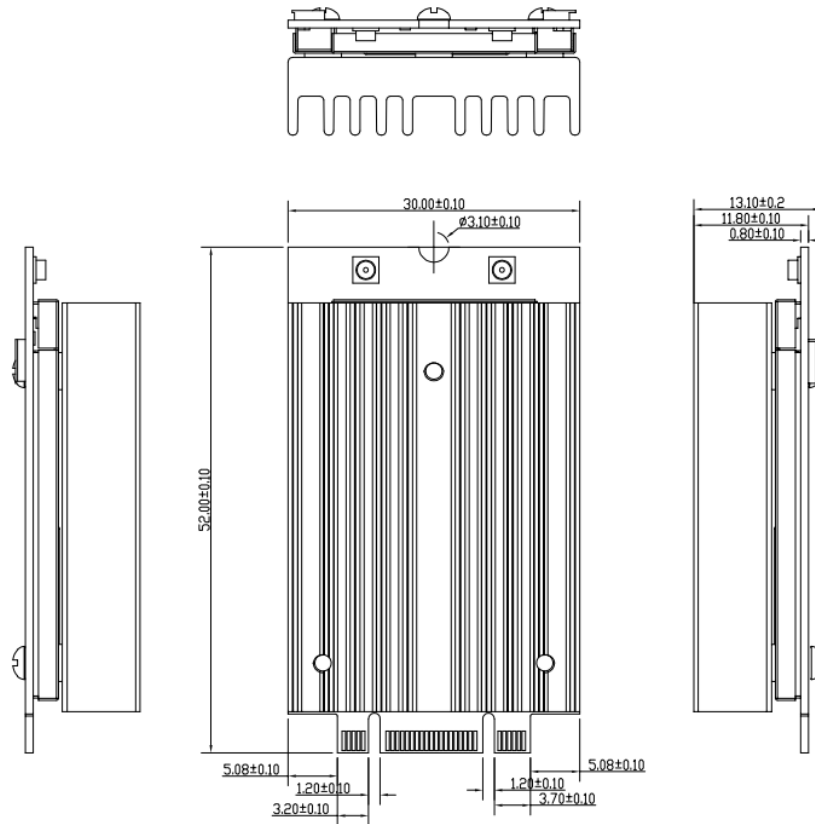

All dimensions are in mm

Ordering Configuration

| Item Code | Model | Description |
|-------------------------|---------------|--|
| WLTB7002E25 7A000TXLF | WLTB7002E25 | QCN6224 2x2 802.11a/b/g/n/ac/ax/be support 2.4+5GHz Dual-Band Concurrent M.2 B+M Key interface with PCIe 3.0 Module |
| WLTB7002E25 7B000NXLF-I | WLTB7002E25-I | QCN9274-I 2x2 802.11a/b/g/n/ac/ax/be support 2.4+5GHz Dual-Band Concurrent M.2 B+M Key interface with PCIe 3.0 Module |

Chipsets Comparisons

| | | QCN6224 | QCN6274 | QCN9274 |
|------------------------|------------------------|----------------------|----------------------|----------------------|
| Band Operation | 4 Single Band | ✓ | ✓ | ✓ |
| | 2+2 Dual Band | ✓ | ✓ | ✓ |
| | 2.4GHz | ✓ | ✓ | ✓ |
| | 4.9GHz | - | - | ✓ |
| | 5GHz | ✓ | ✓ | ✓ |
| | 6GHz | - | ✓ | ✓ |
| Performance | Channel Support | Up to 160MHz at 5GHz | Up to 320MHz at 6GHz | Up to 320MHz at 6GHz |
| | 4K QAM | ✓ | ✓ | ✓ |
| | #clients | 128 | 256 | 512 |
| | #OFDMA users | 8 | 16 | 37 |
| | DL OFDMA + TxBF | - | ✓ | ✓ |
| | DL/UL MU-MIMO | ✓ | ✓ | ✓ |
| Advanced 11be Features | WFA certified MLO | ✓ | ✓ | ✓ |
| | Puncture | Static | Static | Static & Dynamic |
| Others | DPD | ✓ | ✓ | ✓ |
| | FIPS | - | - | ✓ |
| Software Packages | Provisioned Multi Link | ✓ | ✓ | ✓ |
| | Dense Deployment | ✓ | ✓ | ✓ |
| | Location & RF Sensing | ✓ | ✓ | ✓ |